



## SPECIFICATIONS

Design	10000 Lit./min(50Hz)
Displacement	12466 Lit./min(60Hz)
Speed	1400 r.p.m. (50Hz)
	1750 r.p.m. (60Hz)
Normal usage vacuum pressure	Under 40 Torr & 720MMHG
Attainable vacuum pressure	Max 22.5Torr & Max 33mber
Suction port diameter	KS 80A (2) in&out
Motor	Horizontal Motor Standard 3-Phase 380V 60Hz 22kW 4P
Water Capacity	15 °C 기준 60L/MIN
Weight	450 Kg
Painting	Company's standard
Allowable ambient temp.	-10~40 °C

-1 Excluding motor and some other parts.

## Curve referred to dry air at 20°C (68°F) 배기량 SUCTION CAPACITY

냉각수 온도 15 °C 기준

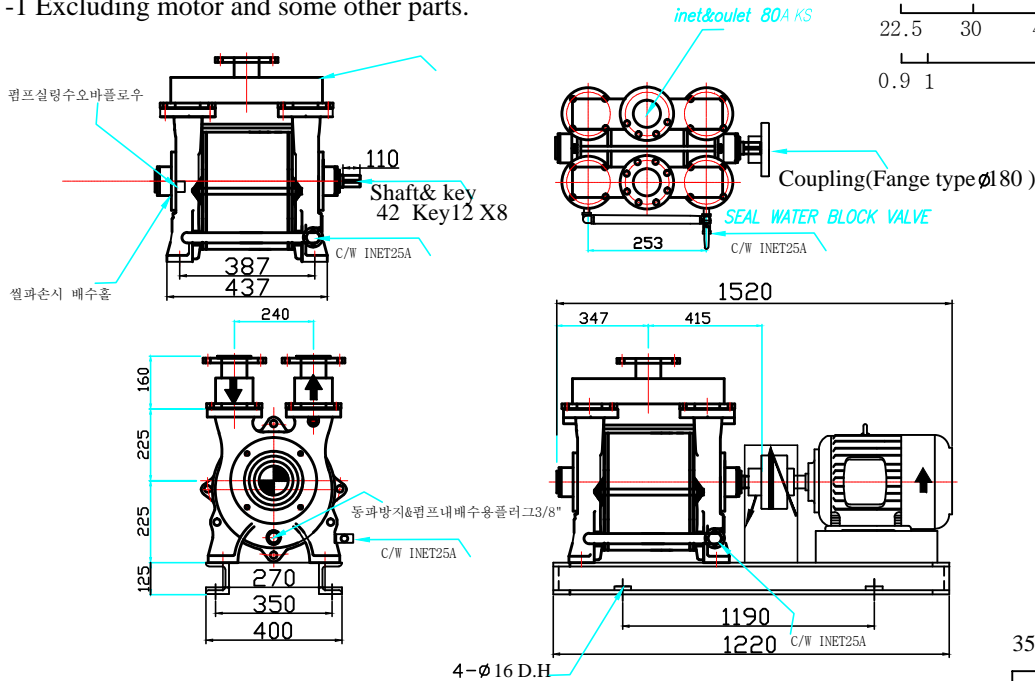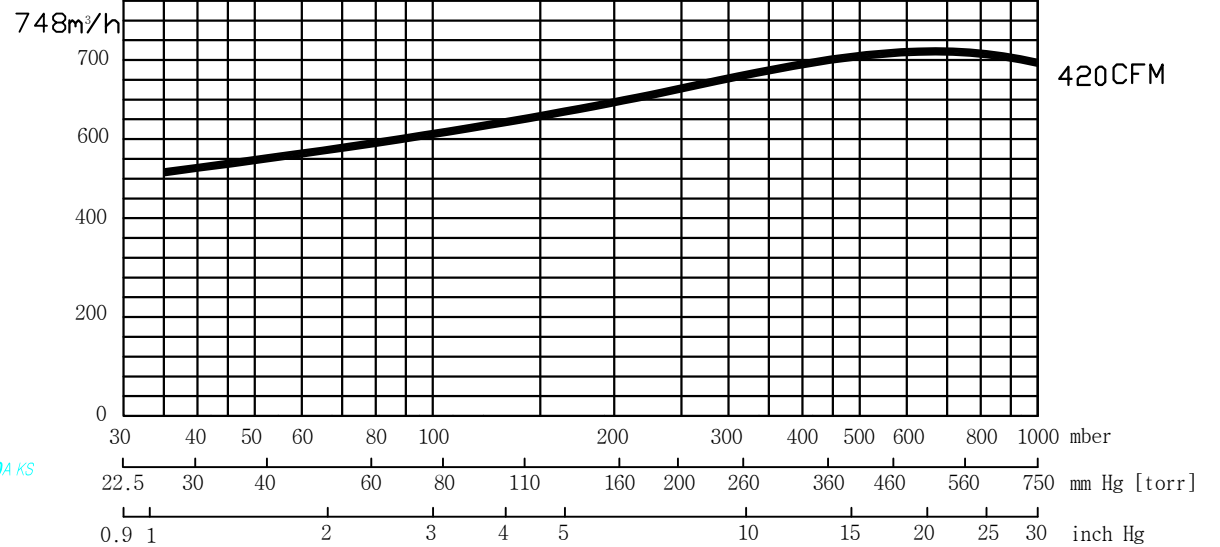

### ACCESSORIES (Option)

- Vacuum Manual Valve
- Vacuum gauge
- Vacuum Check Valve
- Separator Tank
- Gas Ejector 8torr

### CONSUMABLE LIST

(Vacuum.ENG GENUINE PARTS)

Designation	Specification	Quantity/set
M/C SEAL	φ 60	2
Bearing	6310ZZ (Special) Heat - resisting grease	2
Amper	37A 31A	380V 45A
Motor Sepc	180L Shaft 48Key12x5	1
Pump Body	200 kg	1

- 품질 개선을 위해서 예고없이 변경 될수 있음.
- Not binding dimension that can change according to motor make

DWG DATE	SCALE	N/S	TITLE	WATER RING V/P
2016.04.03				CLIENT
DWGBY	DESNBY	CHDBY	APPROVE	LOCATION
진공엔지니어링				DWG NO
				JHLP1-1200