
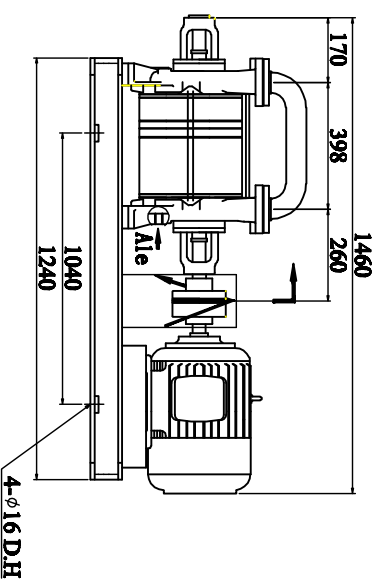




## SPECIFICATIONS

Design	5728	Lit./min(50Hz)
Displacement	7160	Lit./min(60Hz)
Speed	1400 r.p.m. (50Hz)	1750 r.p.m. (60Hz)
Normal usage vacuum pressure	Under Torr	
Attainable vacuum pressure	Max 17torr	
Suction port diameter	JIS 65A (2) (Option:B.S.P.T)	
Motor	Horizontal Motor Standard 3-Phase 220/380V 60Hz 15kW 4P	
Water Capacity	15 C 기준 37L/MIN	
Weight	380 Kg	
Painting	Color- VL951 (Company's standard)	
Allowable ambient temp.	-10 - 40C	

-1 Excluding motor and some other parts.

Curve referred to dry air at 20°C (68°F) 배기량 SUCTION CAPACITY  
 배기수 온도 15 C 기준

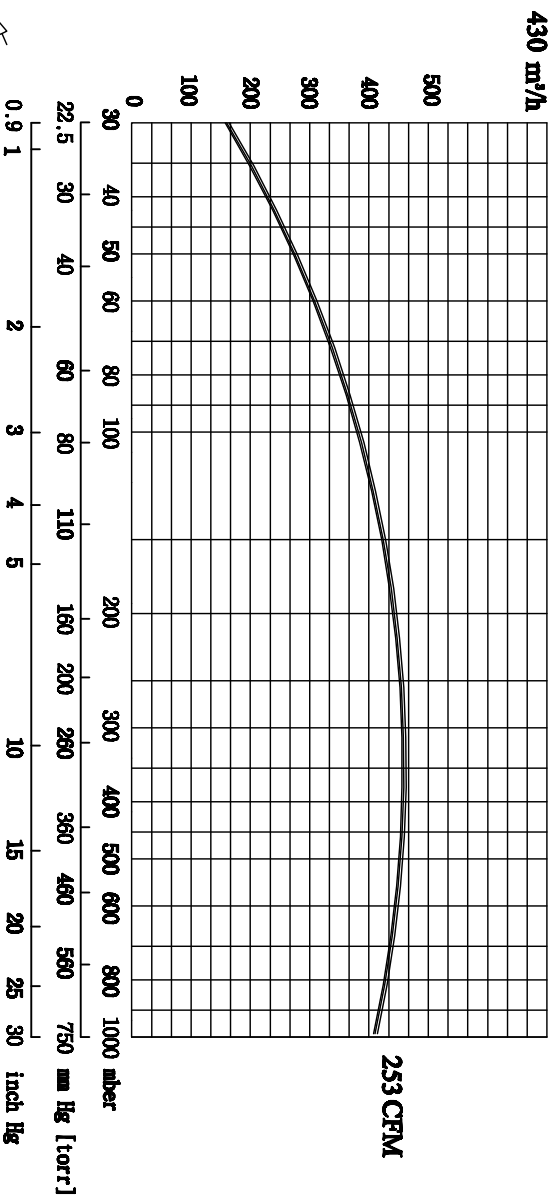

- ACCESSORIES(OPTION)**
- Vacuum Manual Valve
  - Vacuum gauge
  - Vacuum Check Valve
  - Separator Tank

**CONSUMABLE LIST**  
(VACUUM RING GENUINE PARTS)

Designation	Specification	Quantity/set
M/C Seal	φ 45	1
Bearing	6308 ZZ (Special Heat - resisting grease)	2
Half Coupling	φ 130	1
Shaft key	φ 38 10X8	1

DWG DATE	SCALE	N/S	TITLE
2000.00.00			WATER RING V/P
DWG BY	DESIGN BY	CHD BY	APPROVE
			CLIENT
			LOCATION
<b>진공엔지니어링</b>			DWG NO
			JHRP2-14

- 품질 개선을 위해서 예고없이 변경 될수 있음.  
 - Not binding dimension that can change according to motor make