
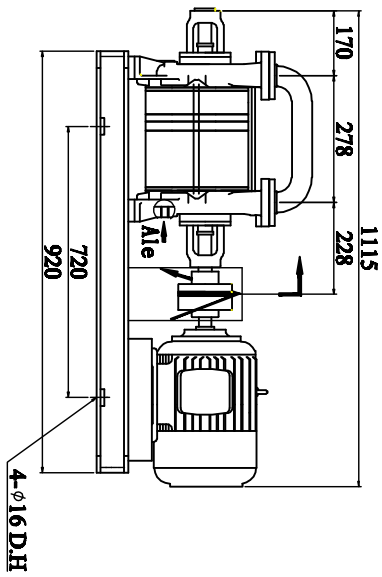




SPECIFICATIONS

Design	2448	Lit./min(50Hz)
Displacement	3060	Lit./min(60Hz)
Speed	1400	r.p.m. (50Hz)
	1750	r.p.m. (60Hz)
Normal usage	Under Torr	
vacuum pressure	Max 17torr	
Attainable vacuum pressure	JIS 50A (2) (Option:B.S.P.T)	
Suction port diameter	Horizontal Motor Standard	
Motor	3-Phase 220/380V 60Hz 5.5kW 4P	
Water Capacity	15 C 기준 14L/MIN	
Weight	182 Kg	
Painting	Color- VL951 (Company's standard)	
Allowable ambient temp.	-10 - 40C	

-1 Excluding motor and some other parts.

Curve referred to dry air at 20°C (68°F) 배기량 SUCTION CAPACITY
 별각수 온도 15 C 기준

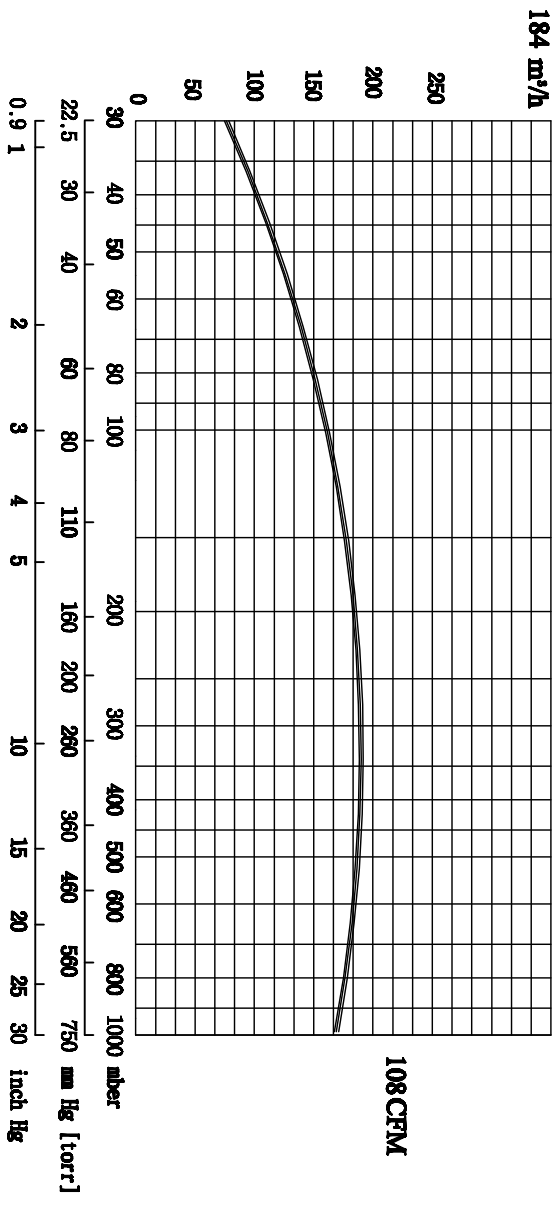

ACCESSORIES(OPTION)

- Vacuum Manual Valve
- Vacuum gauge
- Vacuum Check Valve
- Separator Tank

CONSUMABLE LIST (VACUUM RING GENUINE PARTS)

Designation	Specification	Quantity/set
M/C Seal	φ 38	1
Bearing	6306 ZZ (Special Heat - resisting grease)	2
Half Coupling	φ 115	1
Shaft key	φ 28 8x4	1

DWG DATE	SCALE	N/S	TITLE
2000.05.18			WATER RING V/P
DWG BY	DESIGN BY	CHD BY	APPROVE
CLIENT			LOCATION
DWG NO			JHRP2-8

- 품질 개선을 위해서 예고없이 변경 될수 있음.
 - Not binding dimension that can change according to motor make



진공엔지니어링